


SX5LTJ

LVDS SURFACE MOUNT TEMPERATURE COMPENSATED CRYSTAL CLOCK OSCILLATOR

FEATURES

- ▶ Ultra Low Jitter , 300 fsec typ.
- ▶ Fast delivery

5.0 x 3.2 x 1.5 mm

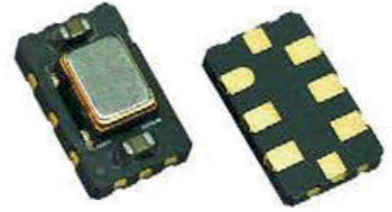


Item		Specification	
Frequency Range		15 MHz ~ 2100.0 MHz	
Output Signal		LVDS	
Supply Voltage Vdd		+1.8V ±10% +2.5V ±10% +3.3V ±10%	
Supply Current Idd		90.0 mA max	
Frequency Tolerance		±1.0 ppm at 25°C ±2°C	
Frequency Stability	vs Temperature	±1.0 ppm over -40° to +85°C	
	vs Aging	±1.0 ppm max. per year at 25°C	
	vs Voltage Change	±0.2 ppm max. , for a ±5% input voltage change	
	vs Load Change	±0.2 ppm max. , for a ±10% load condition change	
	vs Reflow	±1.0 ppm max. , 1 reflow and measured 24 hours afterwards	
Output Voltage HIGH VOH		1.43V typ. ; 1.6V max.	
Output Voltage LOW VOL		1.1V typ. ; 0.9V min.	
Output Load		100 Ohm between output and complementary output	
Symmetry		45 / 55 %	
Rise / Fall time Fr/Ff		0.35 ns max.	
Tri-state function		pin #2 : high or open pin #2 : low	pin #4 : oscillation pin #4 : high impedance
Current with Output Disable		73 mA typ.	
Start-up Time		5 ms typ.	
Integrated Phase Jitter (12 kHz to 20 MHz)	15 MHz - 50 MHz	500 fsec typ.	
	51 MHz - 250 MHz	300 fsec typ.	
	251 MHz - 2100 MHz	250 fsec typ.	
Packing Unit		1000pcs / reel	
Soldering Condition		260°C , 10 sec x2 max	

OPTIONS & ORDERING INFORMATION

SX5LTJ					MHz
	Supply voltage	Operating Temp. *	Temperature Stability *	Tri-state Function	Frequency in MHz
	18 = +1.8V 25 = +2.5V 33 = +3.3V	K = 40° / +85°C	1.0 = ±1.0 ppm 1.5 = ±1.5 ppm 2.5 = ±2.5 ppm	E2 = Tri-state , pin 2	Please specify the frequency in MHz

* Note : Not all combinations are possible , please consult us.

OUTLINE DIMENSIONS (MM)

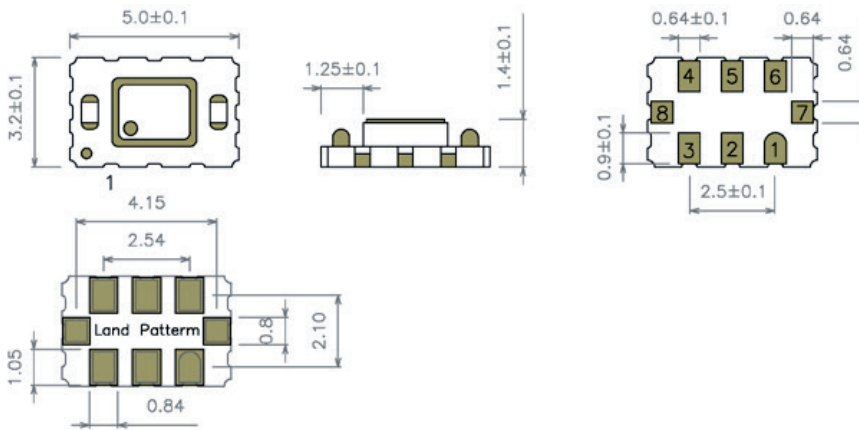

Pin Connections

- #1 : GND
- #2 : E/D
- #3: GND
- #4 : Output
- #5 : Complementary Output
- #6 : Vdd
- #7 : Do Not Connect
- #8 : Do Not Connect