


## SX5SVT

## CLIPPED SINE WAVE SURFACE MOUNT VCTCXO

### FEATURES

- Miniature package
- Tight stability
- Many options available
- Applications: GPS, Mobile phone, WLAN, ...

5.0 x 3.2 x 1.3 mm



Item	Specification						
Frequency Range	6.4 MHz to 52.0 MHz						
Output Logic	Clipped Sine Wave						
Supply Voltage V <sub>dd</sub> (see options)	+1.8 V ±5%	+2.5 V ±5%	+2.8 V ±5%	+3.0 V ±5%	+3.3 V ±5%		
Supply Current I <sub>dd</sub>	≤ 26 MHz		1.5 mA max.				
	> 26 MHz		2.0 mA max.				
Frequency Tolerance	±1.0 ppm max. at 25°C ±2°C (one hour after reflow)						
Frequency Stability vs Temperature (see options)		±0.5 ppm	±1.0 ppm	±1.5 ppm	±2.0 ppm	±2.5 ppm	±3.0 ppm
	-10° to +60°C	o	o	o	o	o	o
	-20° to +70°C	o	o	o	o	o	o
	-30° to +75°C	o	o	o	o	o	o
	-30° to +85°C	o	o	o	o	o	o
	-40° to +85°C	o	o	o	o	o	o
	o = available		◇ = please contact us		x = not available		
Frequency Stability vs Aging	±1.0 ppm max. per year at 25°C						
Frequency Stability vs Voltage Change	±0.2 ppm max., for a ±5% input voltage change						
Frequency Stability vs Load Change	±0.2 ppm max., for a ±10% load condition change						
Output Level	≥0.8 V p-p						
Output Load	10 kΩ // 10 pF						
Phase Noise	Offset / dBc / Hz	100 Hz	1 kHz	10 kHz			
	(typical)						
	13.0 MHz	-115 dBc / Hz	-135 dBc / Hz	-148 dBc / Hz			
Start-up Time	3 ms max.						
Voltage Control Function	<b>Control Voltage Range</b>	Center voltage +1.5 V, range ±1.0V					
	<b>Frequency Pulling Range</b>	±5 ppm min.					
	<b>Linearity</b>	10 % max.					
	<b>Slope Polarity</b>	Positive					
	<b>Input Impedance</b>	1 MΩ min.					
	<b>Modulation Bandwidth</b>	3 kHz min. (at -3 dB)					
Packing Unit	1000 pcs / reel						
Soldering Condition	260°C, 10 sec x2 max						

Customer specifications on request

## OPTIONS & ORDERING INFORMATION


### SX5SVT

Supply Voltage *	Operating Temp. *	Temperature Stability *	Tri-state Function	Package type	Pulling **	Frequency in MHz
18 = +1.8V	D = -10° / +60°C	0.5 = ±0.5 ppm	F = No Tri-state	4P = 4-pad version	05 = ±5 ppm min.	Please specify the frequency in MHz
25 = +2.5V	F = -20° / +70°C	1.0 = ±1.0 ppm				
28 = +2.8V	G = -30° / +75°C	1.5 = ±1.5 ppm				
30 = +3.0V	H = -30° / +85°C	2.0 = ±2.0 ppm				
33 = +3.3V	K = -40° / +85°C	2.5 = ±2.5 ppm				
		3.0 = ±3.0 ppm				

(\*) Note : Not all combinations are possible, please consult us.

(\*\*) Other pulling range is available on customer specification.

## OUTLINE DIMENSIONS

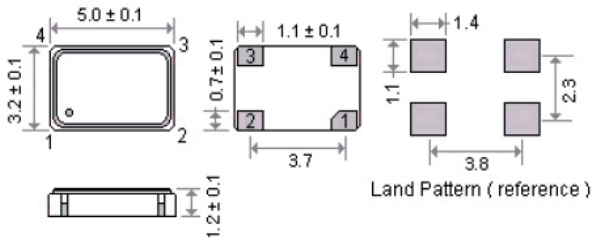

Pin Connections #1 : Control voltage #2 : GND #3 : Output #4 : Vdd